



ACCESSORIES

2013

2014

PTS

Thermostat. In low temperatures acts as a switch to activate the heaters and/or fan, at low temperatures.



FAN 12V FAN 24V

12V,150mA/24V,150mA Fan. Used to maintain a certain air circulation inside the housing. Perfect for condensation problems. Supplied with all required bracket and fixing screws.



PTPS

Anti climb top tamper or pressure tamper. It detects a pressure over 25Kg on the top of the tower.



PTKH

Easy and fast way for fixing TAKEX's beams to the tower. Optional and sold in pairs (Rx/Tx).




PT2H

Twin beams bracket for PT Tower. Sold in single units.



DC 12V DC 24V

12V-3,5A / 24V-1,8A power supply with battery charger output. A bracket and fixing kit are included.



PTS50

Thermostat for high temperatures. When the temperature rises above 50° C (122 ° F), it activates the fans.



MB3SB

0,70m height side brackets for increase tower rigidity. Already included in 3m models.



PTLUX

Lamp accessory extension for PT towers only. Only low-energy light bulbs. (E27)



BEAG

Easy and fast way for fixing OPTEX's beams to the tower. Optional and sold in pairs (Rx/Tx).



PT4R

Guy wires to be used under extreme conditions and at strong winds locations.



PTFA

Useful solution for fixing a Battery in the tower.



PTH24V

12/24V or 12V extra power 250/250/500mA heater. A must for those areas where exist risk of condensation. At least one unit per Rx/Tx is recommended.



PTFB

Concrete floor bracket to assure a better fixing of the tower to the ground, perfect for uneven or not compact terrains.



PTCCTV

Perfect solution to integrate up to 2 CCTV cameras in a beam tower. to monitor/record every event.



PTSSL

Easy and fast way for fixing OPTEX's beams to the tower. Optional and sold in pairs (Rx/Tx).



PTWB

Bracket to fix PT to a wall. Fixing kit is not included.



PT clip

Perfect wire/cable organizer. Sold in 10 units pack.



Accessories MB

● MB Wall ● MB Ground

PTS

Thermostat. In low temperatures acts as a switch to activate the heaters and/or fan, at low temperatures.



FAN 12V FAN 24V

12V, 150mA/24V, 150mA Fan. Used to maintain a certain air circulation inside the housing. Perfect for condensation problems. Supplied with all required bracket and fixing screws.



MB3R

Guy wires to be used under extreme conditions and at strong winds locations.



BEAG

Easy and fast way for fixing OPTEX's beams to the tower. Optional and sold in pairs (Rx/Tx).



DC 12V DC 24V

12V-3,5A / 24V-1,8A power supply with battery charger output. A bracket and fixing kit are included.



PTS50

Thermostat for high temperatures. When the temperature rises above 50° C (122 ° F), it activates the fans.



MB3SB

0,70m height side brackets for increase tower rigidity. Already included in 3m models.



MBPS

Anti climb top tamper or pressure tamper. It detects a pressure over 25Kg on the top of the tower.



PTSSL

Easy and fast way for fixing OPTEX's beams to the tower. Optional and sold in pairs (Rx/Tx).



PTFA

Useful solution for fixing a Battery in the tower.



PTH24V

12/24V or 12V extra power 250/250/500mA heater. A must for those areas where exist risk of condensation. At least one unit per Rx/Tx is recommended.



MBFB

Concrete floor bracket to assure a better fixing of the tower to the ground, perfect for uneven or not compact terrains.



PTKH

Easy and fast way for fixing TAKEX's beams to the tower. Optional and sold in pairs (Rx/Tx).



PT clip

Perfect wire/cable organizer. Sold in 10 units pack.



PTS

Thermostat. In low temperatures acts as a switch to activate the heaters and/or fan, at low temperatures.



MA FAN 12V MA FAN 24V

12V,150mA / 24V,150mA Fan. Used to maintain a certain air circulation inside the housing. Perfect for condensation problems. Supplied with all required bracket and fixing screws.



PTS50

Thermostat for high temperatures. When the temperature rises above 50° C (122 ° F), it activates the fans.



MAH24V

12 / 24 or 12V extra power 250/250/500mA heater. A must for those areas where exist risk of condensation.






MAH

12V / 250mA Heater. A must for those areas where exist risk of condensation.



MAFB

Concrete floor bracket. Useful accessory to assure a better fixing of the tower to the ground. Perfect for uneven or not compact terrains.

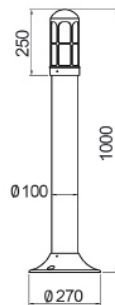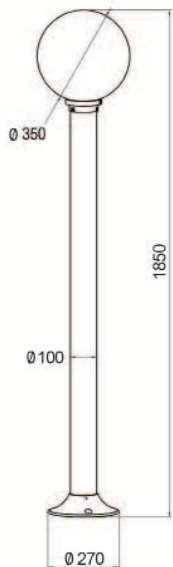

www.bunkerseguridad.es

